



402705-06-07-08

## GRAZER RGBW / TUNABLE WHITE

Linear wall mounted luminaire for outdoor installation for façade/wall grazing, length 500 mm or 1.000mm, interface DMX 512. Anodized extruded copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Remote 24V DC driver needed, with 9 to 24 multi-chip CREE LED. IP66 rating.





### Technical features



### Technical data

IP Rating	IP66
IK Rating	IK08
Material	Extruded aluminum
Remote driver	Constant voltage 24V DC
Gasket	Silicone rubber
Glass	Tempered
Power cable:	Input and output power cable for loop-in/loop-out installation, supplied with male and female connector

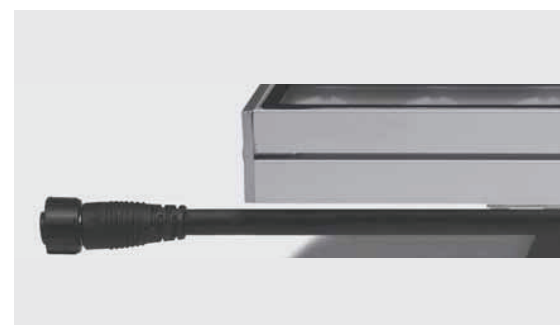

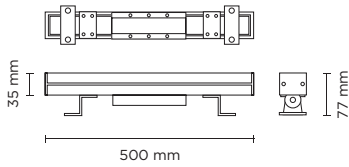


**402705** **GRAZER-9 500 RGBW / TUNABLE WHITE**

light source	light beam options	lumen output (lm)
<b>RGBW</b>		
high-power led	20° / 40° / 60° / 15x60° / 15x25°	810
<b>Tunable white</b>		
high-power led	20° / 40° / 60° / 15x60° / 15x25°	1.134

**Technical data**

Wattage	18 WATT
Voltage	24V DC
Length	500 mm
Light source	Nr. 9 CREE LED
Gross weight	2,00 Kg

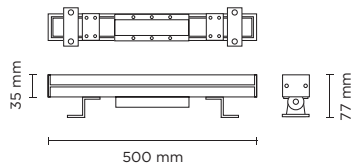


**402706** **GRAZER-12 500 RGBW / TUNABLE WHITE**

light source	light beam options	lumen output (lm)
<b>RGBW</b>		
high-power led	20° / 40° / 60° / 15x60° / 15x25°	1.080
<b>Tunable white</b>		
high-power led	20° / 40° / 60° / 15x60° / 15x25°	1.404

**Technical data**

Wattage	24 WATT
Voltage	24V DC
Length	500 mm
Light source	Nr. 12 CREE LED
Gross weight	2,00 Kg

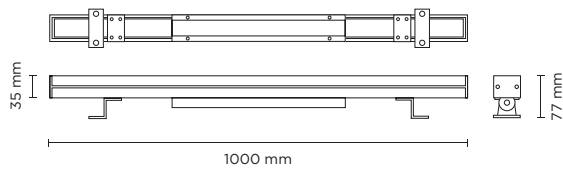


**402707** **GRAZER-18 1000 RGBW / TUNABLE WHITE**

light source	light beam options	lumen output (lm)
<b>RGBW</b>		
high-power led	20° / 40° / 60° / 15x60° / 15x25°	1.620
<b>Tunable white</b>		
high-power led	20° / 40° / 60° / 15x60° / 15x25°	2.106

**Technical data**

Wattage	36 WATT
Voltage	24V DC
Length	1.000 mm
Light source	Nr. 18 CREE LED
Gross weight	3,00 Kg

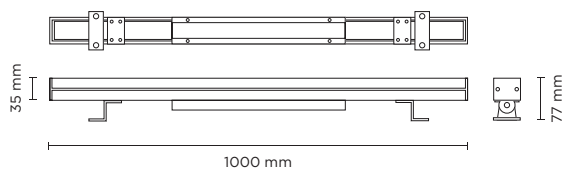

**402708** **GRAZER-24 1000 RGBW / TUNABLE WHITE**

light source	light beam options	lumen output (lm)
<b>RGBW</b>		
high-power led	20° / 40° / 60° / 15x60° / 15x25°	2.160
<b>Tunable white</b>		
high-power led	20° / 40° / 60° / 15x60° / 15x25°	2.808

**Technical data**

Wattage	48 WATT
Voltage	24V DC
Length	1.000 mm
Light source	Nr. 24 CREE LED
Gross weight	3,00 Kg