

KLIP

ID CODE: 64




Modern source for a new way of lighting objects in the name of quality, efficiency and discretion.

Precise, uniform accent lighting with excellent colour performance: ideal for the retail, historical and hospitality environments or museums.








Design
esse-ci

FEATURES

-  Direct Emission
-  UGR < 19
-  IP 40





LED

-  3000K/4000K
- >96 lm/W icon" data-bbox="155 558 170 578"/> >96 lm/W
-  CRI > 90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST


-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM.3h code
-  2700K - 5000K
-  Reflectors 10° - 40°

Specifications · Built-in driver
· LED CoB technology

Optic Internal aluminium reflectors from 20° - 50° beam angles. Frosted Glass.

Body Manufactured from pressure die-cast aluminum.

Colours ○ White RAL 9003 wrinkled - Code: W
● Black RAL 9005 wrinkled - Code: BK

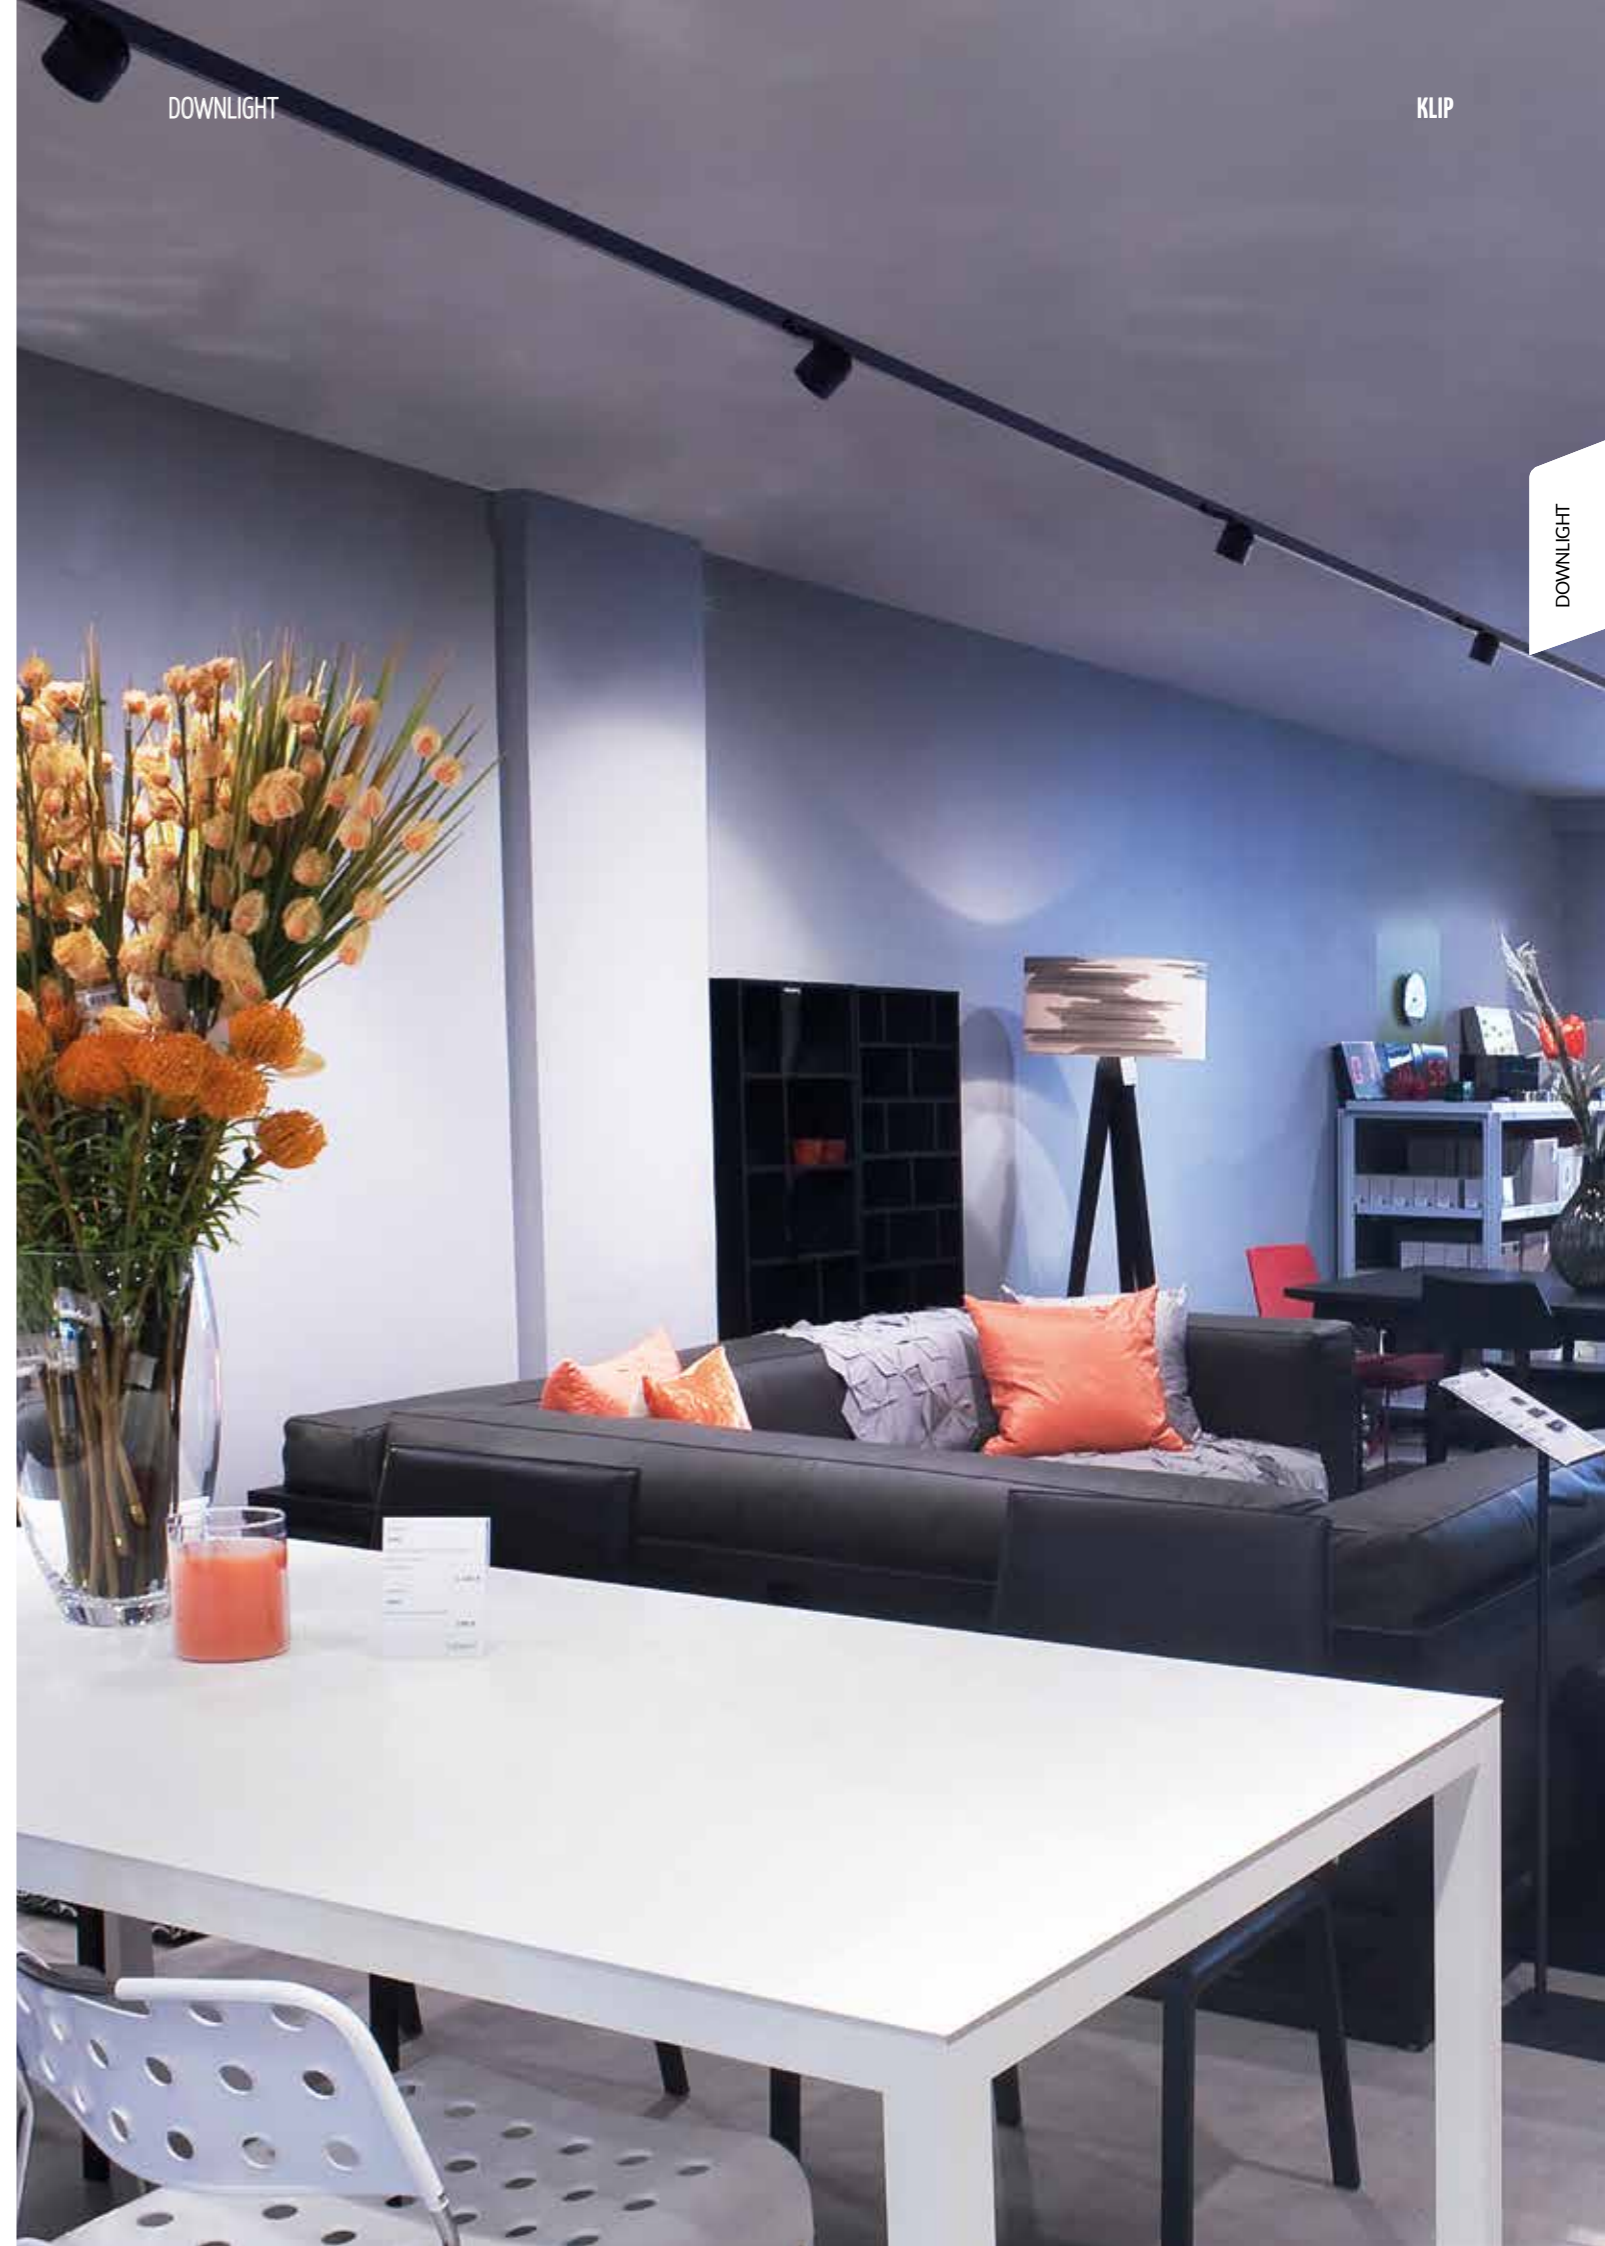

DOWNLIGHT


KLIP

DOWNLIGHT


KLIP

OPTIC

Internal aluminum reflectors:
20°- 50° beam angles.

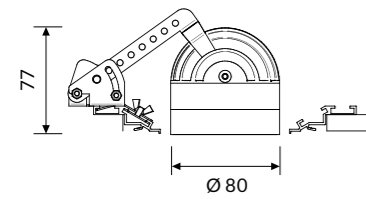

IP 40 A++

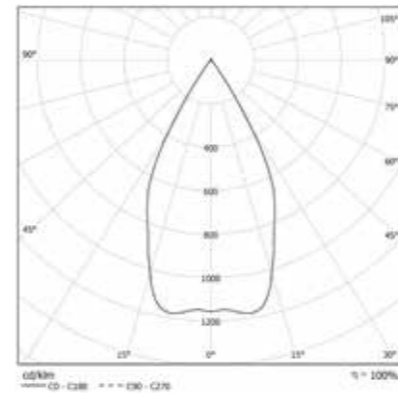

COLOUR TEMPERATURE

4000K

COD	Light Bulb Icon	lm
64VT9L49020	9W 20°	866
64VT9L49050	9W 50°	866
64VT13L49020	13W 20°	1072
64VT13L49050	13W 50°	1072
64VT18L49020	18W 20°	1485
64VT18L49050	18W 50°	1485
64VT26L49020	26W 20°	2503
64VT26L49050	26W 50°	2503

3000K

COD	Light Bulb Icon	lm
64VT9L39020	9W 20°	831
64VT9L39050	9W 50°	831
64VT13L39020	13W 20°	1020
64VT13L39050	13W 50°	1020
64VT18L39020	18W 20°	1413
64VT18L39050	18W 50°	1413
64VT26L39020	26W 20°	2400
64VT26L39050	26W 50°	2400

KLIP SIDE PROFILES

Side aluminum profiles for recessed installation in continuous line. Each item code consists of n°2 aluminum profiles, connection plates and spacers.




COD	mm
64PL1000	1000
64PL2000	2000
64PL3000	3000




KLIP HEADERS KIT

Headers kit for recessed continuous line.



COD

64AAPIL

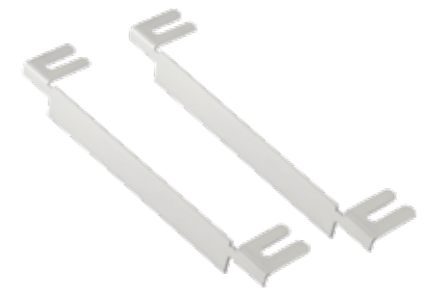

Accessories



64MC1000: 1000mm
64MC2000: 2000mm
Dark housing for false ceiling.

OPTICS



64AAMG
Frosted Glass.

Technical Note

BODY ROTATION AND INSTALLATION

