





601501

PROMENADE ROUND 01

700mm height bollard, round shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminium cover. Polycarbonate Fresnel diffuser, moulded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 220-240V 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

AC053 - Base Plate

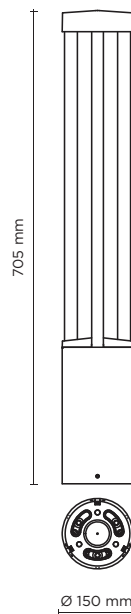

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--|-------------------|------------------------|
| 3000°K warm-white | | | |
| cob led | <input checked="" type="checkbox"/> 360° | 2.900 | 111.54 |
| 4000°K neutral-white | | | |
| cob led | <input checked="" type="checkbox"/> 360° | 3.100 | 119.23 |

Finish color options:

- Textured Grey
RAL 9006
- Anthracite Grey
RAL 7016
- Matt Black
(on request)

Technical features



Technical data

| | |
|--------------|--|
| Wattage | 26 WATT |
| IP Rating | IP66 |
| IK Rating | IK10 |
| Material | High corrosion resistance die-cast copper-free aluminum body |
| Coating | Polyester powder coating with phosphochromating pre-finish |
| Light source | NR. 1 COB CREE "CXB 1520" LED |
| Screws | Stainless steel |
| Transformer | Electronic power supply 220/240V 50/60Hz built-in |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Cable gland | M16 rubber grommet |
| Power cable: | not included |
| Gross weight | 6,50 Kg |

