

esse-ci

# WAVE

ID CODE: 85

Soft-line design for a truly versatile range: WAVE is suitable both as an element for single installation and as a system for continuous suspended or recessed rows. Direct/indirect emission with High Contrast microcell optical system and high glare control.

See also:  
WAVE DISPLAY p. 114



Design  
esse-ci

## FEATURES

- Direct Emission
- Direct/Indirect Emission
- UGR < 16
- IP 40

## LED

- 3000K/4000K
- >107lm/W
- CRI > 90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 > 50.000h

## CERTIFICATIONS

- CE
- A++
- 5 years warranty

## ON REQUEST

- DALI - RDD code (verify the version)

**Specifications** Built-in driver.

**Optic** · High Contrast diffuser UGR < 16  
· Double emission: direct / indirect

**Body** Aluminium body with epoxy powder coating.

**Colour** ○ White RAL 9003 (with black optics and end caps) - Code: B  
● Black RAL 9005 (with white optics and end caps) - Code: C8

CONTINUOUS ROWS

WAVE

CONTINUOUS ROWS




# WAVE


## OPTIC

High Contrast diffuser UGR <16.

End caps included. See accessories on p. 37.

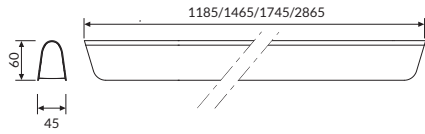

IP 40 A++



## COLOUR TEMPERATURE

4000K

COD	Im	mm
85DR36DKL490	36W 3852	1185
85DR45DKL490	45W 4815	1465
85DR54DKL490	54W 5778	1745
85DR90DKL490	90W 9630	2865

3000K


COD	Im	mm
85DR36DKL390	36W 3582	1185
85DR45DKL390	45W 4478	1465
85DR54DKL390	54W 5374	1745
85DR90DKL390	90W 8956	2865

# WAVE DOUBLE EMISSION


## OPTIC

High Contrast diffuser UGR <16 and upper diffuser for dual emission: direct / indirect.

End caps included. See accessories on p. 37.

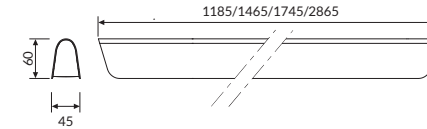

IP 40 A++

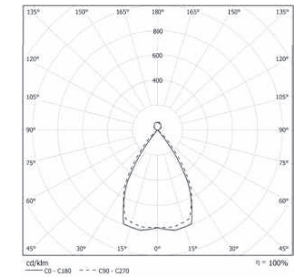

## DIRECT // INDIRECT EMISSION

mm	Power Direct Mod.	Power Indirect Mod.
1185	36	12
1465	45	16
1745	54	16
2865	90	32

## COLOUR TEMPERATURE

4000K

COD	Im	mm
85DI48DKL490	48W 5148	1185
85DI61DKL490	61W 6543	1465
85DI70DKL490	70W 7506	1745
85DI122DKL490	122W 13086	2865

3000K

COD	Im	mm
85DI48DKL390	48W 4787	1185
85DI61DKL390	61W 6085	1465
85DI70DKL390	70W 6981	1745
85DI122DKL390	122W 12170	2865

# Accessories



## 85AA13

Single wire 1500mm long adjustable suspension kit.



## 85AA1330

Single wire 3000mm long adjustable suspension kit.



## 85AA16

3 pole-powered supply box. Cable length 2000mm.



## 00AA165P

5 pole-powered supply box. Cable length 2000mm.



## 85AA11

Flexible mechanical/electrical creative joint.