





601503

## PROMENADE SQUARE 01

700mm height bollard, square shape, for outdoor surface installation, 360° downward light emission, phospho-chromatised and polyester powder coated extruded aluminum body and die-cast aluminium cover. Polycarbonate Fresnel diffuser, moulded silicone gasket and stainless steel screws. Anchorage flange with threaded bolts included. Built-in LED driver 220-240V 50-60Hz, with 1 x COB CREE "CXB 1520" LED. IP66 rating.

AC053 - Base Plate

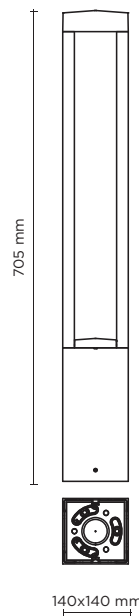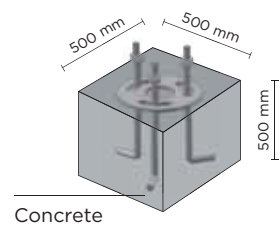

| light source                | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|-----------------------------|--------------------|-------------------|------------------------|
| <b>3000°K warm-white</b>    |                    |                   |                        |
| cob led                     | 360°               | 2.900             | 111.54                 |
| <b>4000°K neutral-white</b> |                    |                   |                        |
| cob led                     | 360°               | 3.100             | 119.23                 |

**Finish color options:**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)

**Technical features**

IP 66

IK 10

CE

5 YEARS

1-10V

DALI

NEW

**Technical data**

|              |  |
|--------------|--|
| Wattage      | 26 WATT  |
| IP Rating    | IP66   |
| IK Rating    | IK10   |
| Material     | High corrosion resistance die-cast copper-free aluminum body |
| Coating      | Polyester powder coating with phosphochromating pre-finish   |
| Light source | NR. 1 COB CREE "CXB 1520" LED                                |
| Screws       | Stainless steel  |
| Transformer  | Electronic power supply 220/240V 50/60Hz built-in            |
| Gasket       | Silicone rubber  |
| Glass        | Tempered   |
| Cable gland  | M16 rubber grommet   |
| Power cable: | not included   |
| Gross weight | 6,80 Kg  |

