




# DIMPLES

Design Serge & Robert Cornelissen

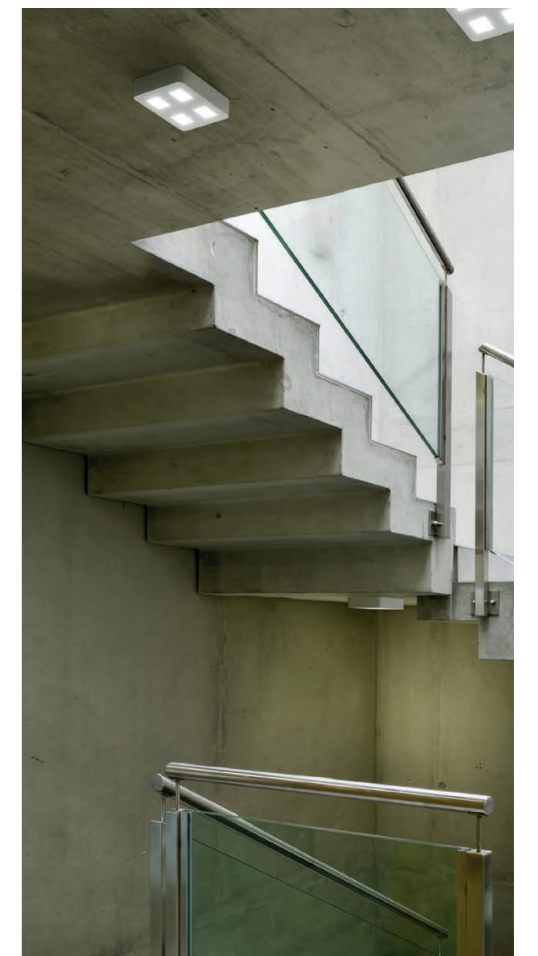



**η** >110 lm/W

**CRI** >80


**IP** 40

**UGR** <19; <22



DIMPLES MINI



DIMPLES



DIMPLES LONG





# D I M P L E S

DIMPLES is a recessed, suspended and ceiling mounted installations fixture. Characterized by its very shallow profile height of just 38mm, integrated drivers and unique aesthetics. The individual microcells contain optics that can either be specified for offices applications requiring low glare, or general lighting applications with broad lateral light distribution for core areas, including meeting rooms and break-out spaces. DIMPLES is offered in a wide range of outputs and sizes, for direct only or bi-directional light distribution, making it an extremely versatile lighting collection and a huge step beyond the conventional edge lit lighting panels.

## SPECIFICATIONS

- Integrated driver
- Colour temperature: 3000K/4000K
- CRI>80
- McAdams 3
- Life Time: L80/B50 >50.000h
- 5 years complete warranty
- Eye safety: risk-free (RG 0) in accordance with EN62471:2009

## OPTICS

Satin ABS reflectors with primary PC frosted diffuser, UGR<19  
PG version with additional frosted PC coplanar screen, UGR<22  
Double emission: direct / indirect

## BODY

Frosted ABS body-diffuser with anodized aluminum base.

## LEGAL REFERENCES

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## CERTIFICATIONS

CE IP40  
ErP Class: A++ - A+

## COLOUR

White RAL 9003 - Code: B

## ON REQUEST

- Wiring DALI dimmable - Code: RDD (verify the version available)
- Wiring with emergency kit - Code: EM for 1 hour / EM3H for 3 hours (verify the version available)
- Driver Bluetooth - Code: BT (verify the version available)

## VERSIONS

DIMPLES MINI  
DIMPLES MINI PG  
DIMPLES  
DIMPLES PG  
DIMPLES LONG  
DIMPLES LONG PG

DIMPLES DOUBLE EMISSION  
DIMPLES PG DOUBLE EMISSION  
DIMPLES LONG DOUBLE EMISSION  
DIMPLES LONG PG DOUBLE EMISSION  
ACCESSORIES



/ 1 4 2



## DIMPLES MINI



### OPTIC

Satin ABS reflectors with primary PC frosted diffuser, UGR<19.

IP 40 A++

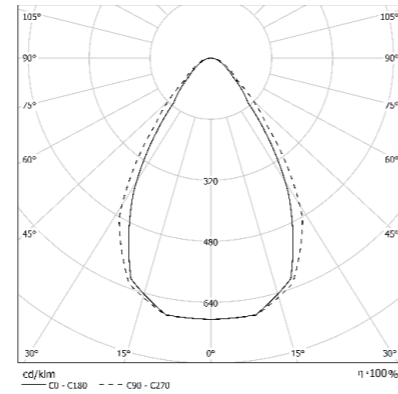


### COLOUR TEMPERATURE //

#### 4 0 0 0 K

COD		lm	mm
48DR10L4	10W 4000K	900	150X150
48DR13L4	13W 4000K	1430	150X150

#### 3 0 0 0 K

COD		lm	mm
48DR10L3	10W 3000K	850	150X150
48DR13L3	13W 3000K	1365	150X150



1 4 3 /

## DIMPLES



## DIMPLES MINI PG



### OPTIC

Satin ABS reflectors with primary PC frosted diffuser with additional frosted PC coplanar screen, UGR<22

IP 40 A++

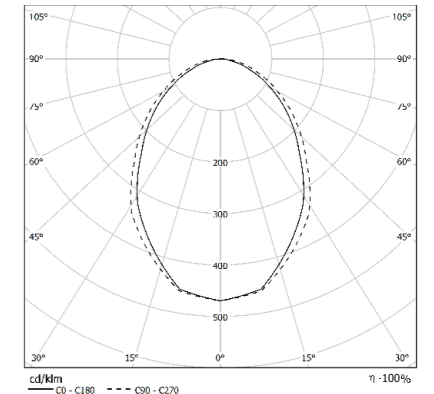

### COLOUR TEMPERATURE //

#### 4 0 0 0 K

COD		lm	mm
48PG10L4	10W 4000K	860	150x150
48PG13L4	13W 4000K	1235	150x150

#### 3 0 0 0 K

COD		lm	mm
48PG10L3	10W 3000K	820	150x150
48PG13L3	13W 3000K	1183	150x150



/ 1 4 4



# DIMPLES



## OPTIC

Satin ABS reflectors with primary PC frosted diffuser, UGR<19.

IP 40 A+

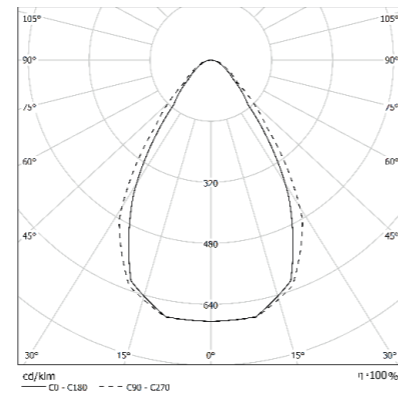


## COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
48DR44L4	44W 4000K	4340	595x595

3 0 0 0 K

COD		lm	mm
48DR44L3	44W 3000K	4120	595x595



1 4 5 /

# DIMPLES



## Double Emission



## OPTIC

Satin ABS reflectors with primary PC frosted diffuser, UGR<19, and upper diffuser for dual emission: direct / indirect.

IP 40 A+

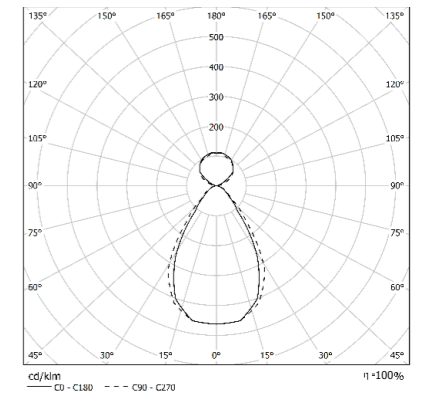

## DIRECT // INDIRECT EMISSION

mm	Power Direct Mod.	Power Indirect Mod.
595x595	44W	16W

## COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
48DI60L4	60W 4000K	6100	595x595

3 0 0 0 K

COD		lm	mm
48DI60L3	60W 3000K	5800	595x595



/ 1 4 6



# DIMPLES PG



## OPTIC

Satin ABS reflectors with primary PC frosted diffuser with additional frosted PC coplanar screen, UGR<22

IP 40 A+

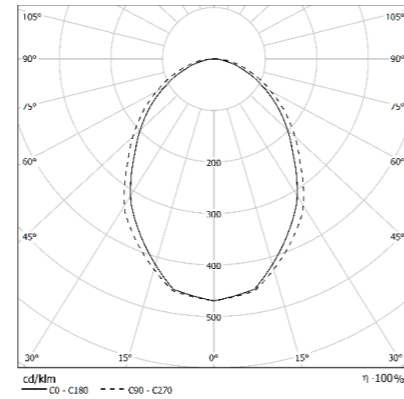


## COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
48PG44L4	44W 4000K	4220	595x595

3 0 0 0 K

COD		lm	mm
48PG44L3	44W 3000K	4010	595x595



1 4 7 /

# DIMPLES



# DIMPLES PG Double Emission



## OPTIC

Satin ABS reflectors with primary PC frosted diffuser with additional frosted PC coplanar screen, UGR<22 and upper diffuser for dual emission: direct / indirect.

IP 40 A+

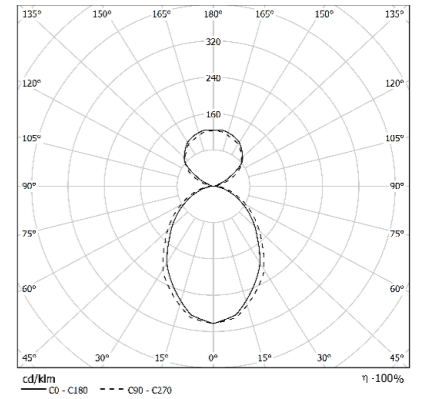

## DIRECT // INDIRECT EMISSION

mm	Power Direct Mod.	Power Indirect Mod.
595x595	44W	16W

## COLOUR TEMPERATURE //

4 0 0 0 K

COD		lm	mm
48DI60PGL4	60W 4000K	5985	595x595

3 0 0 0 K

COD		lm	mm
48DI60PGL3	60W 3000K	5764	595x595



/ 1 4 8



# DIMPLES LONG



## OPTIC

Satin ABS reflectors with primary PC frosted diffuser, UGR<19.

IP 40 A+

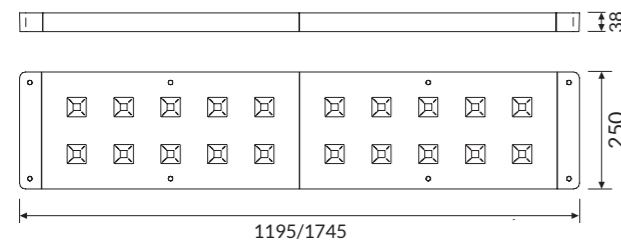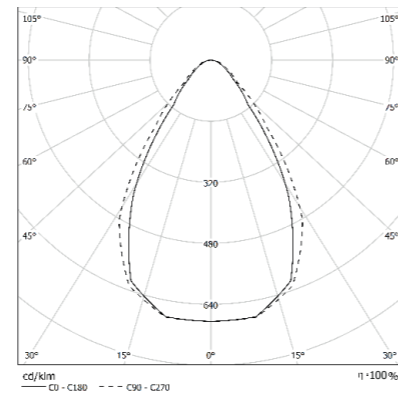


## COLOUR TEMPERATURE //

### 4 0 0 0 K

COD		lm	mm
48DR35L4L	35W 4000K	3350	250x1195
48DR52L4L	52W 4000K	5220	250x1745

### 3 0 0 0 K

COD		lm	mm
48DR35L3L	35W 3000K	3170	250x1195
48DR52L3L	52W 3000K	4960	250x1745



# DIMPLES

1 4 9 /



# DIMPLES LONG Double Emission



## OPTIC

Satin ABS reflectors with primary PC frosted diffuser, UGR<19, and upper diffuser for dual emission: direct / indirect.

IP 40 A+

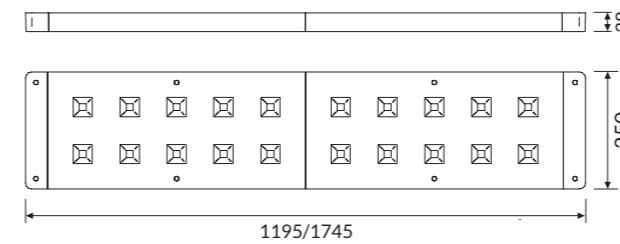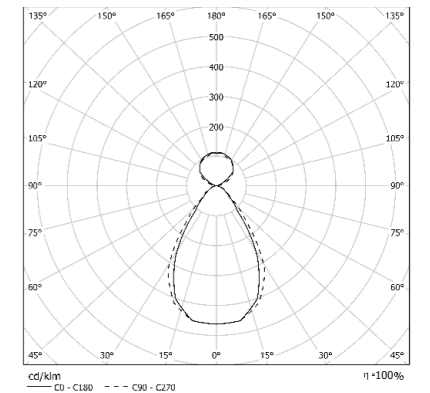

## DIRECT // INDIRECT EMISSION

mm	Power Direct Mod.	Power Indirect Mod.
250x1195	35W	17W
250x1745	52W	18W

## COLOUR TEMPERATURE //

### 4 0 0 0 K

COD		lm	mm
48DI52L4L	52W 4000K	5220	250x1195
48DI70L4L	70W 4000K	7200	250x1745

### 3 0 0 0 K

COD		lm	mm
48DI52L3L	52W 3000K	4960	250x1195
48DI70L3L	70W 3000K	6850	250x1745



/ 1 5 0



# DIMPLES LONG PG



## OPTIC

Satin ABS reflectors with primary PC frosted diffuser with additional frosted PC coplanar screen, UGR<22

IP 40 A+

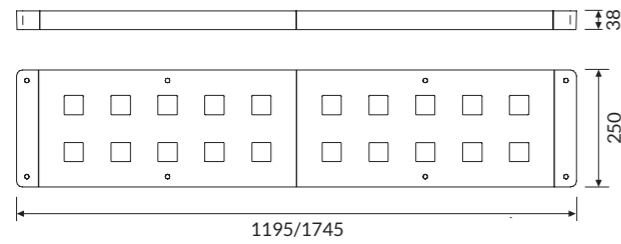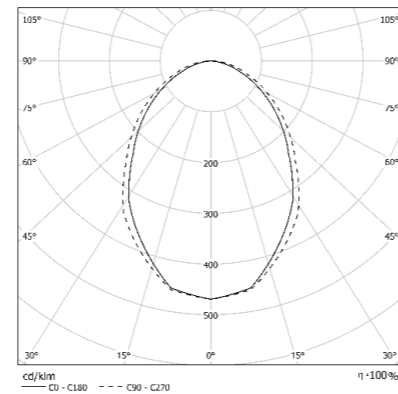


## COLOUR TEMPERATURE //

### 4 0 0 0 K

COD		lm	mm
48PG35L4L	35W 4000K	3230	250x1195
48PG52L4L	52W 4000K	5100	250x1745

### 3 0 0 0 K

COD		lm	mm
48PG35L3L	35W 3000K	3085	250x1195
48PG52L3L	52W 3000K	4840	250x1745



1 5 1 /

# DIMPLES



# DIMPLES LONG PG Double Emission



## OPTIC

Satin ABS reflectors with primary PC frosted diffuser with additional frosted PC coplanar screen, UGR<22 and upper diffuser for dual emission: direct / indirect.

IP 40 A+

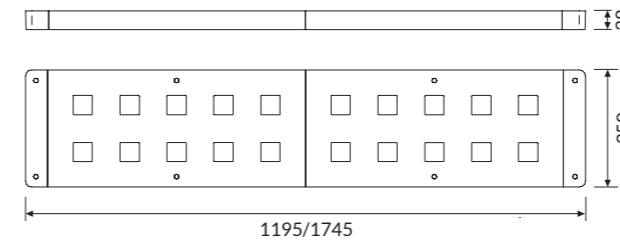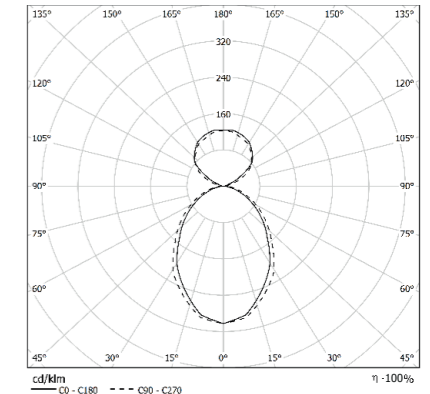

## DIRECT // INDIRECT EMISSION

mm	Power Direct Mod.	Power Indirect Mod.
250x1195	35W	17W
250x1745	52W	18W

## COLOUR TEMPERATURE //

### 4 0 0 0 K

COD		lm	mm
48DI52PGL4L	52W 4000K	5125	250x1195
48DI70PGL4L	70W 4000K	7140	250x1745

### 3 0 0 0 K

COD		lm	mm
48DI52PGL3L	52W 3000K	4870	250x1195
48DI70PGL3L	70W 3000K	6760	250x1745

ACCESSORIES



48AA13

Single wire 1500mm long adjustable suspension kit.



48AA1330

Single wire 3000mm long adjustable suspension kit.



48AA16

3 poles-ceiling rose power. Cable length 2000mm.



48AA165P


5 poles-ceiling rose power. Cable length 2000mm.

TECHNICAL NOTE

OPTICS



Satin ABS reflectors with primary PC frosted diffuser

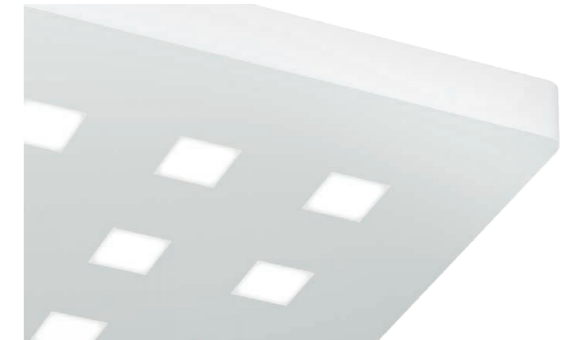

PG version with additional frosted PC coplanar screen