



GHOSTFEED 2.0

GHOSTFEED2.0 is the new **single-cable system** that, with a minimal installation impact, is able to create **continuous lines of light** extending up to fifteen meters. The special tensioners require **only two anchoring points**, thus finding space even in those architectural solutions where the presence of the light source must be particularly discreet. The low voltage system of **GHOSTFEED2.0** allows the installation of LED strips for **direct and indirect light**; further versatility is conferred by accessories such as diffusing optics, blind modules and adjustable micro-spots for accent lighting.

ID 15



FEATURES


 Direct/Indirect emission

 UGR < 22;


 IP 40

LED


 2700K/3000K/4000K

 >100lm/W


 CRI >90


 Eyesafety: RG0/RG1


 MacAdams 3

 L80/B10 >50.000h

CERTIFICATIONS

 EEA Conformity

 Energy efficiency

 5 years warranty

ONREQUEST

 DALI - code D

 Bluetooth - code BT

SPECIFICATIONS

Remotedriver.
Diffuser in satin methacrylate
for direct / indirect emission.

BODY

Steel sheet with epoxy
powders coating.

COLORS


White wrinkled opaco RAL9003
- code W
Matte black RAL9005
- code BK

LAREN 

GHOSTFEED 2.0

IP 40

Kit of two die-cast aluminum wall tensioners and metal support strip.

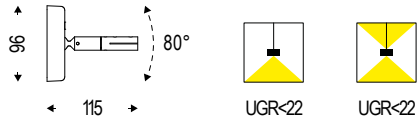

Cod	m
15GF5	5
15GF10	10
15GF15	15

GHOSTFEED STRIP

IP 20

Adhesive LED strip 48V CRI>90, 10W/m.
Length 5000mm, sectionable every 100mm.



Cod.4000K	sten	lm/mt	mm
15SL10K4	10W	940	5000


Cod.3000K	sten	lm/mt	mm
15SL10K3	10W	813	5000

Cod.2700K	sten	lm/mt	mm
15SL10K27	10W	760	5000

GHOSTFEED SPOT ZOOM

IP 40

Micro spot with adjustable beam from 10° to 40° including attack for Ghostfeed 2.0.



Cod.4000K	sten	lm
15ZM3K4GF	3W	262
15ZM7K4GF	7W	560

Cod.3000K	sten	lm
15ZM3K3GF	3W	238
15ZM7K3GF	7W	510

Cod.2700K	sten	lm
15ZM3K27GF	3W	221
15ZM7K27GF	7W	474

ACCESSORIES



PGsatin diffuser,
for direct/indirect light.

- 15PG1000 L. 1000 mm
- 15PG2000 L. 2000 mm
- 15PG3000 L. 3000 mm



Blind module, available
in White and Black.

- 15MC1000 L. 1000mm
- 15MC2000 L. 2000mm
- 15MC3000 L. 3000mm



Quickconnector for
strip-cable connection.

15AA09CR



Quickconnector for
strip-strip connection.

15AA11SS



48V- 75W and 150W driver
for remote installation.

- 15LV7548IS
- 15LV15048IS

TECHNICAL NOTES



CONFIGURATION EXAMPLE

Maximum length of the metal band: 15m.

Two-point wall anchoring. 40 degrees of maximum inclination towards the wall mount.

