



Technical features




Technical data

Wattage	8 WATT
IP Rating	IP68 - 3 METERS DEPTH
IK Rating	IK08
Material	Completely made in stainless steel AISI 316 L marine grade
Trim	Stainless steel AISI 316 L marine grade
Light source	NR. 5 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Remote driver	350/500 mA NEEDED
Gasket	Silicone rubber
Recess housing	made in acetal resin
Glass	Tempered
Cable gland	M12 made in stainless steel AISI 316
Power cable	8 mt. neoprene power cable included
Cable sheath	made in PVC
Gross weight	5,00 Kg

301006

SCUBA MEDIUM RECESS

Underwater luminaire, wall-recessed, completely made in stainless steel AISI 316L, silicone o-rings, acetal resin housing for recess. 350/500mA remote driver needed, with 5 CREE XP-G3 LED. IP 68 rating.

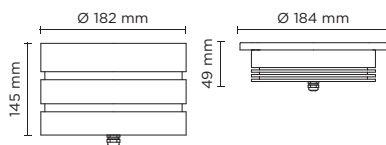

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	720	90.00
high-power led	30°	684	85.50
high-power led	45°	650	81.25
4000°K neutral-white			
high-power led	10°	750	93.75
high-power led	30°	713	89.13
high-power led	45°	677	84.63

Finish color options:

Stainless Steel

remote driver selection

brand	manufacturer code	type	watt	IP rate	numbers of fixtures
TCI Italy	122356	constant voltage 500 MA	12W	IP20	1
TCI Italy	122204	constant voltage 350 MA/ 500 MA	25W - 35W	IP20	min 1 - max 3
Meanwell	LPC-20-350	constant voltage 350 MA	16.8W	IP67	min 1 - max 2
Meanwell	LPC-20-700	constant voltage 700 MA	21W	IP67	min 1 - max 2
Meanwell	LPF-25-48	constant voltage 530 MA	25W	IP67	min 3 - max 3

