




105003

## SCAPE

Slim rectangular floodlight for outdoor installation on a façade/wall. Phosphochromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 15 CREE XP-G3 LED. IP65 rating.

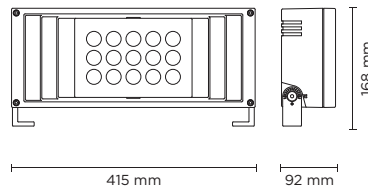

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	10°	2.160	98.18
high-power led	30°	2.052	93.28
high-power led	45°	1.950	88.64
<b>4000°K neutral-white</b>			
high-power led	10°	2.250	102.27
high-power led	30°	2.138	97.18
high-power led	45°	2.031	92.32

### Finish color options:




- Textured Grey  
RAL 9006
- Anthracite Grey  
RAL 7016
- Matt Black  
(on request)

### Technical features



### Technical data

Wattage	22 WATT
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 15 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double M20 cable gland.
Power cable	1 mt. neoprene power cable included
Gross weight	3,80 Kg

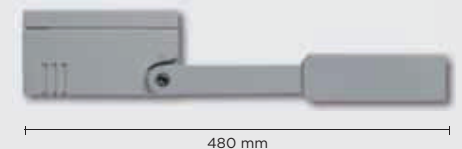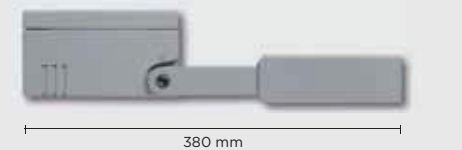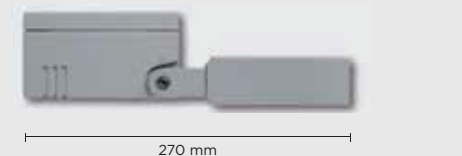

AC003: Wall extensible bracket  
Die-cast aluminum  
(option to be ordered separately)



