

LUDO LINEAR DK

ID CODE: 20

Linear lighting solution with **high contrast microcell optical system** and optimum glare control. Seamlessly integrates within the Esse-ci **48V low voltage track system**, making a winning solution that stands out for its minimal form, functionality and **technical performance**.

See also:
LV TRACK p. 354



Design
esse-ci

FEATURES

-  Direct Emission
-  UGR < 16
-  IP 40

LED

-  3000K/4000K
-  >96 lm/W
-  CRI >90+
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h
- 

CERTIFICATIONS

-  CE
-  A++
-  5 years warranty

ON REQUEST

-  2700K
- 

- Specifications**
- Operating at 48V DC
 - DALI standard
- Optic**
- High Contrast diffuser UGR <16 with PC lens.

- Body**
- Polycarbonate body.
- Colour**
- White RAL 9003 - Code: B
 - Black RAL 9005 - Code: C8

LOW VOLTAGE

LUDO LINEAR DK




LOW VOLTAGE


LUDO LINEAR DK

OPTIC

High Contrast diffuser UGR < 16 with PC lens, 60° beam angle.

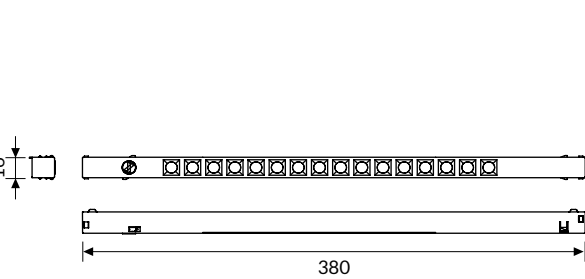


IP 40 A++

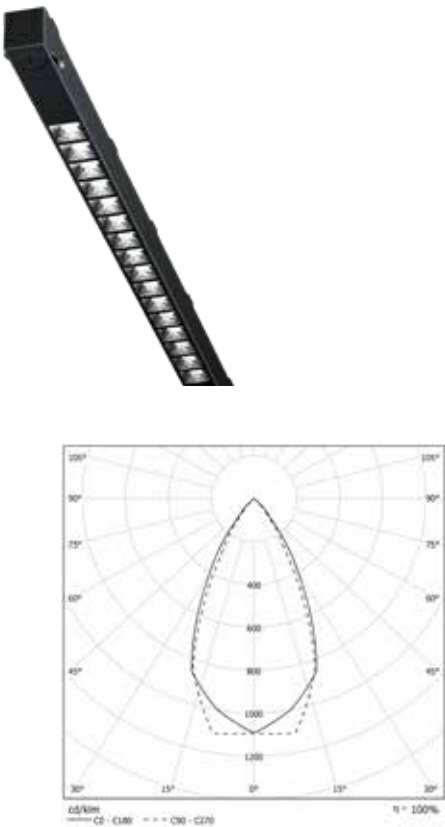

Technical Note

FIXING SYSTEM AND POWER SUPPLY

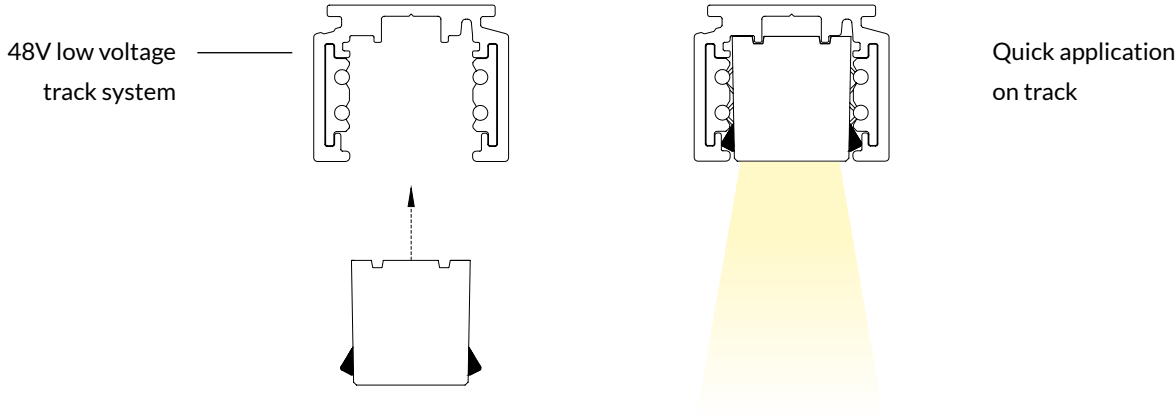

COLOUR TEMPERATURE

4000K

3000K

COD		lm
20DK10L49060RDD	10W 60°	815

COD		lm
20DK10L39060RDD	10W 60°	750