

# HALL LED IP65





ID CODE: 38

A series of high performance LED downlights that are designed for exterior use or any area that demands a high ingress protection rating against both dust and water. HALL LED IP65 features an integrated driver making this a perfect product for installers to use, as this connects straight to mains. A range of beam angles and outputs is offered alongside a dedicated asymmetric version for wall washing, ensuring there is a product to suit almost any application.









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR < 19
-  IP 65
-  -20°C +40°C




## LED

-  3000K/4000K
-  >90 lm/W; >126 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

## ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM 3h code
-  5000K

**Specifications** · CoB LED technology  
· Integrated driver

**Optic** · EASY: internal aluminium reflectors from 15°- 24°- 36°- 50° beam angles  
· MEDIUM e LARGE: internal aluminium reflectors from 10°- 12°- 20°- 40°- 70° beam angles  
· ACCENT LIGHT  
· HIGH WALLWASHER  
· WIDE WALLWASHER

**Body** Manufactured from pressure die-cast aluminum with epoxy powder coating.

**Colour** ○ White RAL 9003 wrinkled - Code: B  
● Black RAL 9005 wrinkled - Code: C8



OUTDOOR IP



HALL LED IP65

OUTDOOR IP

## HALL LED IP65 EASY

### OPTIC

Internal aluminum reflectors:  
15°- 24°- 36°- 50° beam angles.  
CUT OFF > 30°.

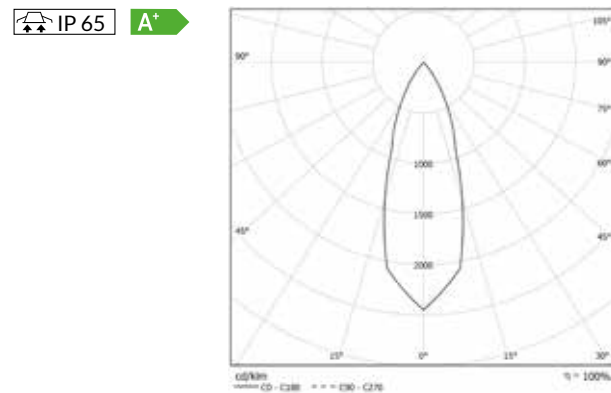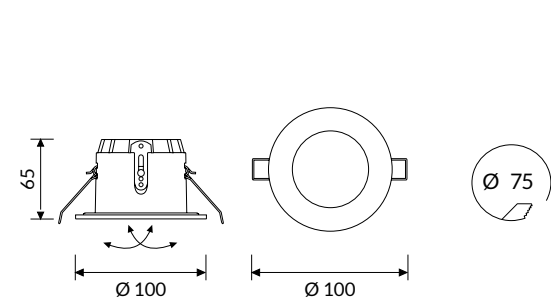

### COLOUR TEMPERATURE 4000K

| COD            | 💡      | lm  |
|----------------|--------|-----|
| 38VT6L49015E65 | 6W 15° | 599 |
| 38VT6L49024E65 | 6W 24° | 599 |
| 38VT6L49036E65 | 6W 36° | 599 |
| 38VT6L49050E65 | 6W 50° | 599 |



### COLOUR TEMPERATURE 3000K

| COD            | 💡      | lm  |
|----------------|--------|-----|
| 38VT6L39015E65 | 6W 15° | 579 |
| 38VT6L39024E65 | 6W 24° | 579 |
| 38VT6L39036E65 | 6W 36° | 579 |
| 38VT6L39050E65 | 6W 50° | 579 |

## HALL LED IP65 MEDIUM

### OPTIC

Internal aluminum reflectors:  
10°- 20°- 40°- 70° beam angles.  
CUT OFF > 30°.

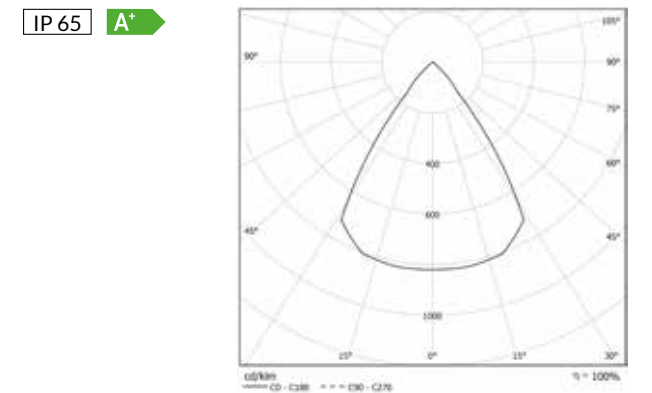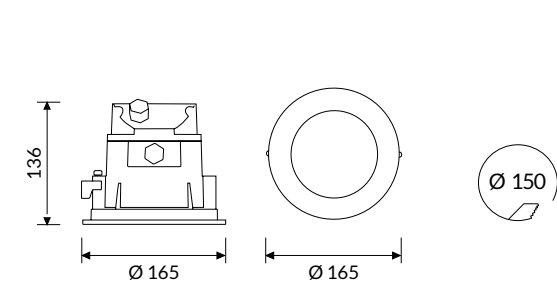

### COLOUR TEMPERATURE 4000K

| COD             | 💡       | lm   |
|-----------------|---------|------|
| 38VT7L49010M65  | 7W 10°  | 655  |
| 38VT7L49020M65  | 7W 20°  | 655  |
| 38VT7L49040M65  | 7W 40°  | 655  |
| 38VT7L49070M65  | 7W 70°  | 655  |
| 38VT18L49010M65 | 18W 10° | 1595 |
| 38VT18L49020M65 | 18W 20° | 1595 |
| 38VT18L49040M65 | 18W 40° | 1595 |
| 38VT18L49070M65 | 18W 70° | 1595 |


### COLOUR TEMPERATURE 3000K

| COD             | 💡       | lm   |
|-----------------|---------|------|
| 38VT7L39010M65  | 7W 10°  | 627  |
| 38VT7L39020M65  | 7W 20°  | 627  |
| 38VT7L39040M65  | 7W 40°  | 627  |
| 38VT7L39070M65  | 7W 70°  | 627  |
| 38VT18L39010M65 | 18W 10° | 1529 |
| 38VT18L39020M65 | 18W 20° | 1529 |
| 38VT18L39040M65 | 18W 40° | 1529 |
| 38VT18L39070M65 | 18W 70° | 1529 |


### HALL LED IP65 MEDIUM ACCENT LIGHT

**OPTIC**

Accent light.  
Transparent glass with internal aluminum reflectors:  
25°- 45°- 60°- 80° beam angles.  
CUT OFF > 30°.

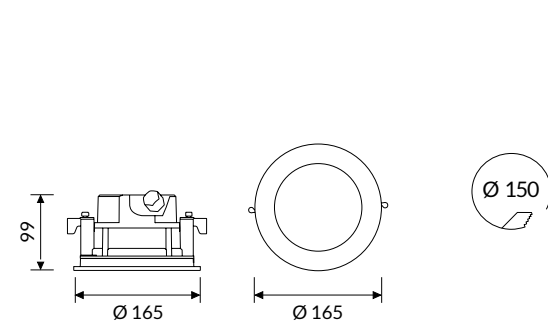

IP 65 A+  
IK10

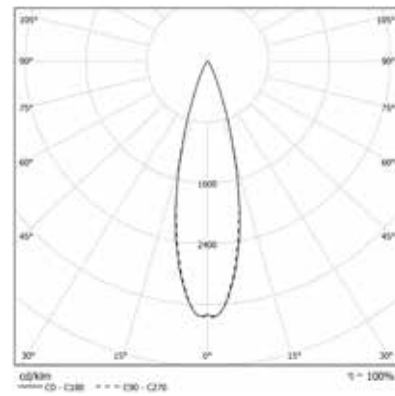

**COLOUR TEMPERATURE** **4000K**

| COD             | Light Bulb Icon | lm   |
|-----------------|-----------------|------|
| 38AL13L49025M65 | 13W 25°         | 1326 |
| 38AL13L49045M65 | 13W 45°         | 1326 |
| 38AL13L49060M65 | 13W 60°         | 1326 |
| 38AL13L49080M65 | 13W 80°         | 1326 |


**COLOUR TEMPERATURE** **3000K**

| COD             | Light Bulb Icon | lm   |
|-----------------|-----------------|------|
| 38AL13L39025M65 | 13W 25°         | 1207 |
| 38AL13L39045M65 | 13W 45°         | 1207 |
| 38AL13L39060M65 | 13W 60°         | 1207 |
| 38AL13L39080M65 | 13W 80°         | 1207 |

### HALL LED IP65 MEDIUM HIGH WALLWASHER

**OPTIC**


HW - High wallwasher.  
Transparent glass with high asymmetric lens.  
CUT OFF > 30°.

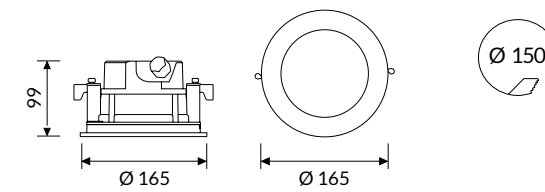

**COLOUR TEMPERATURE** **4000K**

| COD           | Light Bulb Icon | lm   |
|---------------|-----------------|------|
| 38HA13L490M65 | 13W             | 1326 |

IP 65 A+  
IK10

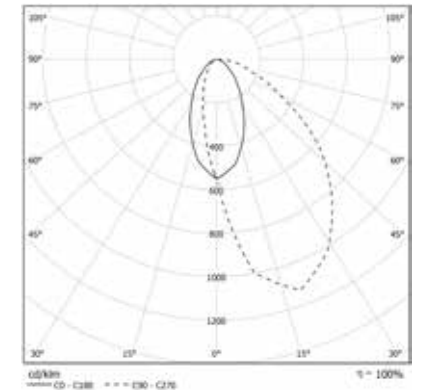


**COLOUR TEMPERATURE** **3000K**

| COD           | Light Bulb Icon | lm   |
|---------------|-----------------|------|
| 38HA13L390M65 | 13W             | 1207 |

### HALL LED IP65 MEDIUM WIDE WALLWASHER

**OPTIC**


WW - Wide wallwasher.  
Transparent glass with wide beam asymmetric lens.  
CUT OFF > 30°.

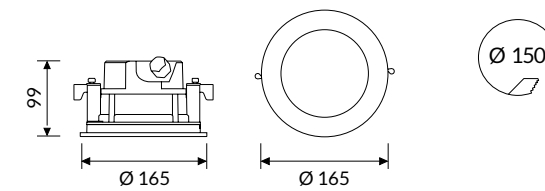

**COLOUR TEMPERATURE** **4000K**

| COD           | Light Bulb Icon | lm   |
|---------------|-----------------|------|
| 38WA13L490M65 | 13W             | 1326 |

IP 65 A+  
IK10

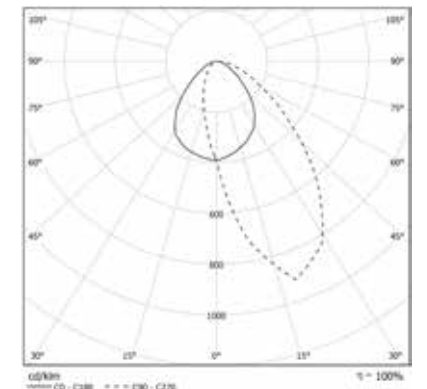

**COLOUR TEMPERATURE** **3000K**

| COD           | Light Bulb Icon | lm   |
|---------------|-----------------|------|
| 38WA13L390M65 | 13W             | 1207 |



# HALL LED IP65 LARGE

## OPTIC

Internal aluminum reflectors:  
12°- 20°- 40°- 70° beam angles.  
CUT OFF > 30°.



IP 65 A\*

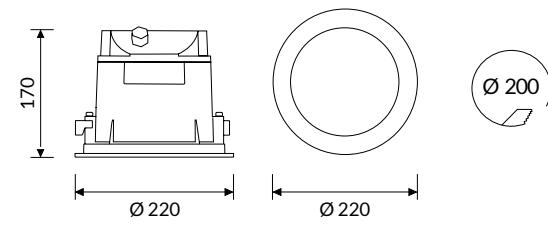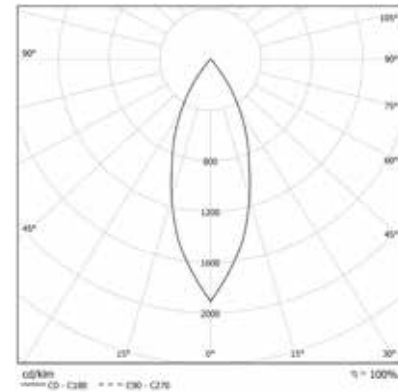

## COLOUR TEMPERATURE


4000K

3000K


| COD             | Beam Angle | lm   |
|-----------------|------------|------|
| 38VT18L49012L65 | 18W 12°    | 2316 |
| 38VT18L49020L65 | 18W 20°    | 2316 |
| 38VT18L49040L65 | 18W 40°    | 2316 |
| 38VT18L49070L65 | 18W 70°    | 2316 |
| 38VT25L49012L65 | 25W 12°    | 3151 |
| 38VT25L49020L65 | 25W 20°    | 3151 |
| 38VT25L49040L65 | 25W 40°    | 3151 |
| 38VT25L49070L65 | 25W 70°    | 3151 |

| COD             | Beam Angle | lm   |
|-----------------|------------|------|
| 38VT18L39012L65 | 18W 12°    | 2240 |
| 38VT18L39020L65 | 18W 20°    | 2240 |
| 38VT18L39040L65 | 18W 40°    | 2240 |
| 38VT18L39070L65 | 18W 70°    | 2240 |
| 38VT25L39012L65 | 25W 12°    | 3048 |
| 38VT25L39020L65 | 25W 20°    | 3048 |
| 38VT25L39040L65 | 25W 40°    | 3048 |
| 38VT25L39070L65 | 25W 70°    | 3048 |

## Accessories

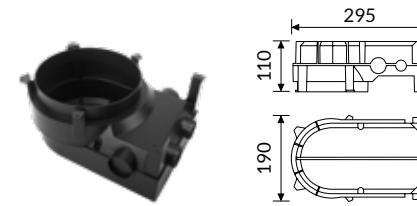


**38AABCM**  
HALL LED IP65 MEDIUM box for recessed installation on concrete.

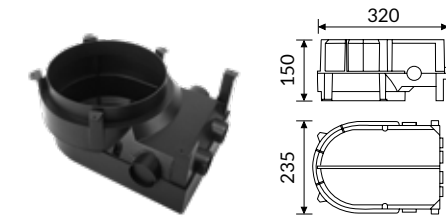

**38AABCL**  
HALL LED IP65 LARGE box for recessed installation on concrete.

## Technical Note


HALL IP65 MEDIUM ACCENT LIGHT



HALL IP65 MEDIUM HIGH WALLWASHER



HALL IP65 MEDIUM WIDE WALLWASHER



## INSTALLATION:

